

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06K 19/077	A1	(11) International Publication Number: WO 00/43952
		(43) International Publication Date: 27 July 2000 (27.07.00)

(21) International Application Number: PCT/US00/02042

(22) International Filing Date: 21 January 2000 (21.01.00)

(30) Priority Data:
09/235,243 22 January 1999 (22.01.99) US

(71) Applicant: INTERMEC IP CORP. [US/US]; 21900 Burbank Boulevard, Woodland Hills, CA 91367-7418 (US).


(72) Inventors: BRADY, Michael, John; 72 Seven Oaks Lane, Brewster, NY 10509 (US). DUAN, Dah-Wei; 1185 Park Lane, Yorktown Heights, NY 10598 (US). MOSKOWITZ, Paul, Andrew; 2015 Hunterbrook Road, Yorktown Heights, NY 10598 (US).

(74) Agents: BERLINER, Brian, M.; O'Melveny & Myers LLP, 400 South Hope Street, Los Angeles, CA 90071-2899 (US) et al.

(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: RFID TRANSPONDER

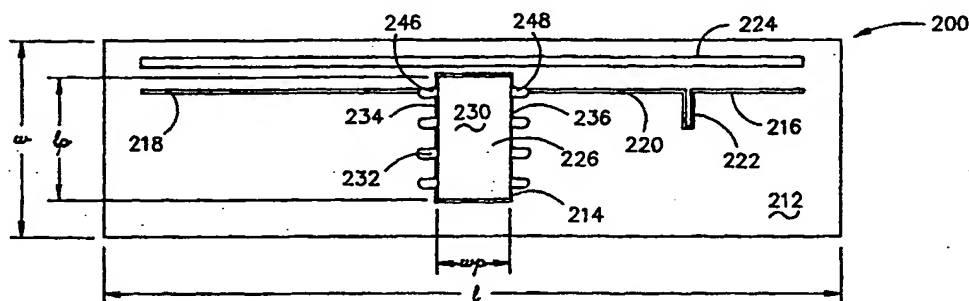

(57) Abstract

A radio frequency identification integrated circuit (RFID IC) chip is packaged and oriented within a plastic molded package so that the RF characteristics of the packaged RFID IC are improved. The RFID IC may be packaged and oriented with respect to the antenna circuit so that the RF characteristics of the transponder are improved and/or the size (length, width, area, etc.) of the substrate is reduced. The packaged (RFID IC) may also be inverted and substantially and operably located within an aperture formed in the substrate of the RFID transponder to reduce the thickness of the transponder.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

RFID TRANSPONDER

Cross-Reference to Related Applications

5 The present application is a continuation-in-part of U.S. Patent Application
 Serial No. 09/191,682 filed November 13, 1998 which claims the benefit under
 35 U.S.C. § 119(e) of U.S. Provisional Application Nos. 60/078,291 filed March
 17, 1998 and 60/103,307 filed October 6, 1998, and claims the benefit under 35
 U.S.C. § 119(e) of U.S. Provisional Application Nos. 60/078,291 filed March 17,
 10 1998, 60/103,307 filed October 6, 1998, and 60/072,317 filed January 23, 1998.
 Said U.S. Patent Application No. 09/191,682 and U.S. Provisional Application
 Nos. 60/078,291, 60/103,307, and 60/072,317 are herein incorporated by
 reference in their entirety.

Incorporation by Reference

15 The following U.S. Patents and Patent Applications are hereby
 incorporated herein by reference in their entirety:

U.S. Patents

	<u>Patent</u>	<u>Issue Date</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
	5,521,601	05/28/96	04/21/95	YO995-0088
20	5,528,222	06/18/96	09/09/94	YO994-180
	5,538,803	07/23/96	11/23/94	YO994-0073
	5,550,547	08/27/96	09/12/94	YO994-185
	5,552,778	09/03/96	11/23/94	YO994-0232
	5,554,974	09/10/96	11/23/94	YO994-0071
25	5,563,583	10/08/96	11/23/94	YO994-070
	5,565,847	10/15/96	11/23/94	YO994-0072
	5,606,323	02/25/97	08/31/95	YO995-157
	5,635,693	06/03/97	02/02/95	YO994-0215
	5,673,037	09/30/97	09/09/94	YO994-184
30	5,680,106	10/21/97	10/27/95	YO995-0219
	5,682,143	10/28/97	09/09/94	YO994-170
	5,729,201	03/17/98	06/29/95	YO995-109

	<u>Patent</u>	<u>Issue Date</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
	5,729,697	03/17/98	04/24/95	YO995-076
	5,736,929	04/07/98	06/07/96	YO996-085
	5,739,754	04/14/98	07/29/96	YO996-115
5	5,767,789	06/16/98	08/31/95	YO994-213
	5,777,561	07/07/98	09/30/96	YO996-178
	5,786,626	07/28/98	03/25/96	YO996-031
	5,812,065	09/22/98	12/08/95	YO995-124X
	5,821,859	10/13/98	06/07/96	YO996-084
10	5,826,328	10/27/98	03/25/96	
	5,828,318	10/27/98	05/08/96	YO996-068
	5,831,532	11/03/98	08/12/97	YO995-109B
	5,850,181	12/15/98	04/03/96	YO995-158

U.S. Nonprovisional Patent Applications

	<u>Application</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
15	08/681,741	07/29/96	YO996-037
			(Issue fee paid 11/18/98)
	08/694,606	08/09/96	YO995-218
	08/733,684	10/17/96	YO996-195
20			(Issue fee paid 12/02/98)
	08/780,765	01/08/97	YO996-196
			(Issue fee paid 12/02/98)
	08/790,639	01/29/97	YO997-024
	08/790,640	01/29/97	YO997-023
25	08/862,149	05/23/97	YO997-116
	08/862,912	05/23/97	YO997-115
	08/862,913	05/23/97	YO997-114
	08/935,989	10/23/97	YO997-310
	09/029,432		UK994-066
30	09/071,413	05/01/98	YO895-0271R1
			(RTH 998-007) (Allowed 12/08/98)

	<u>Application</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
	EH 372 217 464 US	07/10/98	YO896-0212R1
	09/122,300	07/24/98	YO897-259R
	09/153,617		
5	09/167,026	10/06/98	YO897-0062R1
	09/167,149	10/06/98	YO897-0039R1
	09/181,505	10/28/98	38381DR1
	09/182,170	10/29/98	38384R1
	09/183,606	10/30/98	38408R1
10	09/185,858	11/04/98	38394R1
	09/188,089	11/06/98	38393R1
	EL 158 487 235 US	11/13/98	I0018/7000
	EL 158 487 244 US	11/13/98	I0018/7001
	EL 158 487 258 US	11/13/98	I0018/7004
15	EL 158 487 275 US	11/13/98	I0018/7010
	09/191,682	11/13/98	38395R1
	09/195,528	11/18/98	38387R1
	09/195,733	11/19/98	YO897-0676R
	09/199,620	11/25/98	38396R1
20	09/212,909	12/16/98	YO997-378
	09/218,353	12/22/98	YO894-0206R1
	09/219,822	12/23/98	YO897-0337R1
	09/220,272	12/23/98	YO895-0100R1
	09/220,432	12/24/98	YO895-0124R1
25	09/222,598	12/29/98	YO896-0066R1
	09/225,431	01/05/99	YO897-0018R1
	09/225,432	01/05/99	YO896-0336R1
	09/226,499	01/07/99	YO896-0153R1
	09/226,669	01/08/99	YO896-0266R1
30	09/227,649	01/08/99	YO896-0213R1
	09/227,768	01/08/99	998-012

U.S. Provisional Patent Applications

	<u>Application</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
	60/068,122	12/19/97	
	60/068,373	12/22/97	YO894-0206P1
5	60/073,102	01/30/98	YO897-0028P1
	60/068,645		YO894-0377P1
	60/074,605	02/13/98	YO897-0259P1
	60/075,452	02/20/98	YO897-0271P1
	60/076,363		YO897-0293P1
10	60/077,094	03/06/98	YO897-0353P1
	60/077,873		YO897-0362P1
	60/077,879	03/13/98	YO997-0038P1
	60/078,100	03/16/98	YO897-0657P1
	60/078,226	03/16/98	YO897-0658P1
15	60/078,287	03/17/98	YO897-0661P1
	60/078,304	03/17/98	YO897-0662P1
	60/079,852		YO897-0667P1
	60/080,724		YO897-0670P1
	60/080,900	04/06/98	YO897-0671P1
20	60/090,637	06/25/98	YO896-0212P2
	60/091,350	07/01/98	YO897-0259P2
	60/091,352	07/01/98	YO897-0673P1
	60/098,459	08/31/98	YO894-0206P2
	60/099,298	09/04/98	YO894-0206P3
25	60/099,724	09/10/98	38398P1
	60/100,719	09/17/98	38402P1
	60/105,496	10/23/98	YO897-0683P1
	60/107,631	11/09/98	YO897-0657P2
	60/108,378	11/13/98	YO897-0432P2
30	60/108,546	11/16/98	YO897-0686P1
	60/109,345	11/20/98	YO897-0684P1

<u>Application</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
EL 025 200 612 US	01/22/99	38398P2

The following further documents are also incorporated herein by reference
5 in their entirety:

IBM Technical Disclosure Bulletin

IBM Technical Disclosure Bulletin: Vol. 38 _ 08, August 1995, page 17,
"Multifunction Credit Card Package," by Brady, Moskowitz, and Murphy
(published pseudonymously).

10 Literature Reference

D. Friedman, H. Heinrich, D. Duan, "A low-power CMOS integrated circuit
for field-powered radio frequency identification (RFID) tags," 1997 Digest of
Technical Papers of the IEEE International Solid-State Circuits Conference
(ISSCC), San Francisco, CA, February 1997.

15 PCT Published International Applications

<u>Application</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
PCT/GB96/00061	01/15/96	UK 9-94-066 PCT
PCT/EP95/03703	10/20/95	YO994-242 PCT

20 UK Published Application

<u>Application</u>	<u>Filing Date</u>	<u>Attorney Docket</u>
9710025.9	05/19/97	YO9-96-084

Field of the Invention

The present invention relates generally to radio frequency identification (RFID) systems, and more specifically to RFID transponders for use in RFID systems.

5

Background of the Invention

Radio Frequency Identification (RFID) is becoming an important identification technology in applications such as inventory management, automotive toll debiting, security and personnel identification, factory automation, vehicle identification to name just a few. RFID systems utilize a radio frequency (RF) transmitter-receiver unit (base station or interrogator) to query an RFID transponder or tag located at a distance. The RFID transponder detects the interrogating signal and transmits a response signal comprising encoded data back to the interrogator's receiver. In this manner, RFID systems provide identification functions not found in identification technologies such as optical indicia (e.g., bar code) recognition systems. For example, an RFID system may employ RFID transponders containing read/write memory of up to several kilobytes. Further, several such RFID transponders may be read by a system at one time. These RFID transponders are readable at a distance and do not require direct line-of-sight view by the reading apparatus.

When radio frequency integrated circuits such as radio frequency identification integrated circuits (RFID IC) are packaged in plastic packages such as Small Outline Packages (SOP), Miniature Small Outline Packages (MSOP), Small Outline Integrated Circuit (SOIC) packages, and Thin Shrinkable Small Outline Packages (TSSOP), for example, the RF characteristics of the RFID transponder are usually degraded due to discontinuities caused by the bonding wiring, materials, and geometry of the package. Further, the overall size of the RFID transponder usually becomes larger than it would be were the RFID IC directly attached to the substrate. As a result, the advantages of using packaged RFID IC's such as robustness, versatility, and availability may be outweighed by the poorer performance and increased size of the RFID transponder.

As a result, it would be advantageous to provide improved methods and apparatus for packaging radio frequency integrated circuits (e.g., RFID IC's) and for mounting packaged RFID IC's in RFID transponders so that the RF characteristics of the transponders are optimized and the size of the transponders is reduced.

Summary of the Invention

Accordingly, the present invention is directed to novel methods and apparatus for packaging radio frequency integrated circuits (RFIC) and in particular radio frequency identification integrated circuits (RFID IC) and mounting packaged RFID IC's in RFID transponders so that the RF characteristics of the transponders are improved and the size of the transponders is reduced.

An RFID transponder in accordance with a first aspect of the present invention includes an insulating substrate having an aperture formed therein and an antenna circuit (including an antenna and, optionally, impedance matching circuits) formed as an integral part of the substrate. A packaged RFID IC, including one or more leads for coupling the RFID IC to the antenna, is inverted and substantially and operably located within the aperture of the substrate so that the leads extend from the aperture and are coupled to the antenna.

In accordance with a second aspect of the present invention, a radio frequency integrated circuit (RFIC) chip such as a radio frequency identification integrated circuit (RFID IC) chip of an RFID transponder is packaged and oriented within a plastic package so that the RF characteristics of the packaged chip are improved. The RFID IC chip may also be packaged and orientated with respect to the antenna so that the RF characteristics of the RFID transponder are improved and/or the size (length, width, area, etc.) of the substrate is minimized.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention claimed. The accompanying drawings, which are

incorporated in and constitute a part of the specification, illustrate an embodiment of the invention and together with the general description, serve to explain the principles of the invention.

5 Brief Description of the Drawings

The numerous objects and advantages of the present invention may be better understood by those skilled in the art by reference to the accompanying figures in which:

FIG. 1 is a block diagram depicting a typical RFID system;

10 FIG. 2 is a top plan view of an RFID transponder in accordance with an exemplary embodiment of the present invention having a simple dipole antenna;

FIG. 3 is a top plan view of an RFID transponder in accordance with an exemplary embodiment of the present invention having a meander dipole antenna;

15 FIG. 4 is a partial cross-sectional side elevational view of the RFID transponder shown in FIG. 1;

FIG. 5 is an isometric view of the RFID transponder shown in FIG. 1;

20 FIG. 6 is a top plan view of an RFID transponder in accordance with an exemplary embodiment of the present invention having a linearly polarized patch antenna;

FIG. 7 is a top plan view of an RFID transponder in accordance with an exemplary embodiment of the present invention having a circularly polarized patch antenna;

25 FIGS. 8 and 9 are top plan views of RFID transponders in accordance with a further exemplary embodiment of the present invention;

FIG. 10 is a partial cross-sectional side elevational view of the RFID transponder shown in FIG. 6;

FIGS. 11, 12 and 13 are block diagrams illustrating interconnection of the RFID IC chip to the leads of a plastic-molded package; and

30 FIG. 14 is a partial cross-sectional side elevational view of a prior art RFID transponder having a packaged RFID IC.

Detailed Description of the Invention

Reference will now be made in detail to the presently preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. As used herein in the specification and claims, references to vertical relationships between elements, i.e., top, bottom, up, down, inverted, etc., are relative to the surface of the substrate of the RFID transponder.

Referring now to FIG. 1, a typical RFID system is shown in which RFID transponders of the present invention may be employed. The RFID system 100 includes an interrogator or base station 112 communicating an RF signal to an RFID transponder 114. The interrogator 112 preferably includes RF transmitter and a receiver sections 116 & 118 for providing two way communication with the RFID transponder 114. The transmitter section 116 preferably includes an RF source 120 and RF amplifier 122 which send RF power to an antenna 124. The transmitter section 116 transmits an RF signal with a transmitter carrier frequency. The transmitter carrier also has a transmitting carrier frequency bandwidth referred to as a transmitting bandwidth. The transmitting bandwidth is preferably wide enough to transmit data at a desired rate.

The RFID transponder 114 comprises an antenna 126 and an RFID circuit 128 including an RF processing section (typically referred to as a front end) 130 and a signal processing section 132. The front end 130 can be any known front end design used with an antenna. Examples of front ends are well known. See, for example, the Hewlett Packard "Communications Components GaAs & Silicon Products Designer's Catalog" (i.e., page 2-15) which is herein incorporated by reference in its entirety. A typical front end is also described in U.S. Patent Application Serial No. 08/790,639 to Duan, et al. filed January 29, 1997 which is herein incorporated by reference in its entirety. The signal processing section 132 may include logic circuits and memory for processing and storing information.

The present invention provides methods and apparatus for packaging

RFID IC's which include the front end and signal processing section of the RFID transponder, and mounting the packaged RFID IC's in RFID transponders so that the RF characteristics of the transponders are improved and the size of the transponders is reduced.

5 Referring now to FIGS. 2 through 10, exemplary RFID transponders in accordance with the present invention are shown. The RFID transponders 200 include an insulating substrate 212 which is preferably formed of a rigid dielectric material such as FR-4 epoxy resin, phenolic, a ceramic, etc., or, alternatively, a flexible material such as polyimide, polyester, or the like. An aperture 214 may
10 be formed in the substrate 212 for receiving a packaged RFID IC 226. The aperture 214 may extend completely through the substrate 212 (e.g., a hole), or, alternatively, only partially through the substrate 212 (e.g., a recess). As shown in FIGS. 2 through 5, the substrate 212 may be rectangular in shape and may have a length (*l*) and a width (*w*). However, it should be appreciated that the
15 substrate may have other geometric or irregular shapes (i.e., circular, oval, square, triangular, curvilinear, etc.) without departing from the scope and spirit of the invention.

An antenna circuit 216 is integrally formed on the substrate 212. Preferably, the antenna circuit 216 consists of a thin pattern (typically 18 to 35
20 micron thick) formed of a conductive metal such as copper. This pattern may be formed by plating, adhering or screening a thin layer of copper (or other conductive metal) onto the substrate 212. The layer is then etched to form the desired geometric configuration of the antenna circuit 216.

Depending on the RF properties desired, the antenna circuit 216 of the
25 present invention may employ any of a large number of different antennas having various configurations and geometries (i.e., monopole, dipole, folded dipole, loop, slot, coil, spiral, meander, patch, etc.). For example, as shown in FIGS. 2 and 5, the antenna circuit 216 may comprise a simple dipole antenna consisting of dipole elements or traces 218 & 220. Alternatively, as shown in
30 FIG. 3, the antenna circuit 216 may comprise a meander dipole antenna. Like the simple dipole antenna shown in FIGS. 2 and 5, the meander dipole antenna

may also comprise dipole elements or traces **218** & **220**. However, the dipole elements **218** & **220** of the meander dipole antenna are bent in a "meander" pattern reducing the antenna's overall length. Further, as shown in FIGS. 6 through 9, the antenna circuit **216** may comprise a patch antenna including a patch element **254** and a conducting ground plane **256**. The conducting ground plane **256** may comprise a layer of conductive metal (e.g., copper) formed (i.e., by plating, adhering or screening, etc.) on the side of the substrate **212** opposite the pattern. The substrate **212** spaces the antenna's radiating element (e.g., patch element **254**, or, alternatively, other structures such as dipole elements, etc. (not shown)) from the ground plane **256**. It should be recognized that reconfiguration of any of the antenna circuits **216** shown herein, or substitution of other types of antennas by one skilled in the art would not depart from the scope and spirit of the invention.

One or more impedance adjustment elements **220** may likewise be integrally formed on the substrate **212** to modify the impedance of the antenna circuit **216**. The impedance adjustment elements **220** may be, for example, lumped circuit elements, distributed microwave circuit elements, or parasitic elements that are electromagnetically coupled to the antenna (i.e., not electrically connected). As shown in FIG. 2, the antenna circuit **216** may, for example, include a tuning stub **222** having a length and width adjusted to tune the impedance of the antenna. The tuning stub **222** acts as a two conductor transmission line and may be terminated either in a short-circuit or open-circuit. A short circuited stub acts as a lumped inductor while an open-circuit stub acts as a lumped capacitor. The magnitude of the reactance of the tuning stub **222** is affected by the stub's length, width, and spacing. Similarly, one or more impedance loading bars **224** may be integrally formed on the substrate **212** adjacent to the antenna in the same manner. The impedance loading bars **224** are electromagnetically coupled to the antenna to modify its impedance. Use of impedance adjustment elements such as tuning stubs and impedance loading bars to adjust the impedance of an antenna is described in detail in U.S. Patent Application Serial No. 08/790,639 to Duan et al., filed January 29, 1997, which is

herein incorporated by reference in its entirety. Further, as shown in FIGS. 6 through 9, the antenna circuit 216 may include impedance matching circuits (i.e., microstrip lines, or the like) 258 & 260. These circuits 258 & 260 which are connected to the packaged RFID IC 226, may interconnect the RFID IC 226 to the radiating element of the antenna circuit 216 (e.g., impedance matching circuit 260) to carry RF signal and energy from the RFID IC 226 to the antenna (e.g., patch antenna element 254) and/or from the antenna 254 to the RFID IC 226. Preferably, the circuits 260 have a length and width chosen to at least partially match the impedance of the antenna 254 and the RFID IC 226.

Referring now to FIGS. 2 through 10, the packaged radio frequency identification integrated circuit (RFID IC) 226 is mounted to the substrate 212 and electrically interconnected to the antenna circuit 216. The packaged RFID IC 226 preferably comprises an RFID IC chip 228 encapsulated within a plastic-molded package 230. The package 230 may be a single in-line package (SIP), dual in-line package, or flat pack package (shown). Typical flat pack IC packages which may be utilized by the present invention include, but are not limited to Small Outline Package (SOP), Miniature Small Outline Package (MSOP), Small Outline Integrated Circuit (SOIC), Plastic Ball Grid Array (PBGA), Thin Quad Flat Pack (TQFP), Low Profile Quad Flat Pack (LQFP), Metric Quad Flat Pack (MQFP), Plastic Quad Flat Pack (PQFP), Plastic Leaded Chip Carrier (PLCC), Thin Shrinkable Small Outline Package (TSSOP), Shrinkable Small Outline Package (SSOP), Quad Small Outline Package (QSOP), Plastic Dual Inline Package (PDIP), SC 70, SC-79, Small Outline Transistor (SOT-23, SOT-143), and Small Outline Diode (SOD-323) packages. Preferably, the package 230 includes a plurality of external leads or pins 232 which electrically couple the packaged IC 230 to the copper pattern or traces formed on the substrate 212. The leads or pins 232 may be arranged in rows along all four sides 234, 235, 236 & 237 of the package 230 (i.e., a quad-flat-pack package), or, alternatively, only on opposite sides 234 & 236 of the package 230 (i.e., an MSOP, or the like) depending on the type of package 230 employed. The leads 232 may be electrically connected to contacts 238 & 240 on the RFID IC chip 228 via

connectors **246 & 248** formed using conventional techniques such as wire bonding or the like (see FIGS. 4 and 10). The leads **232** may then be soldered to the circuit (e.g., antenna circuit **216**) formed on the substrate **212** to, for example, connect the contacts **238 & 240** of the RFID IC chip **228** to the antenna circuit **216** (i.e., directly to the antenna, or, alternatively, to impedance adjustment elements **220** such as impedance matching circuits **258 & 260**).

Packaged RFID IC's have in the past been mounted to a substrate so that the body of the RFID IC package is completely above the upper surface of the substrate. A typical prior art RFID transponder having a flat-pack packaged RFID IC is shown in FIG. 14. The packaged RFID IC **312** of the RFID transponder **300** includes a generally rectangular body **314** having a top surface **316**, a bottom surface **318**, first and second side surfaces **320 & 322**, and first and second end surfaces (not shown). Preferably, the package includes a plurality of leads **324** which extend outwardly from each side surface **320 & 322**. The leads **324** may be generally "S" or "Z" shaped in profile so that they extend downwardly past the bottom surface **318** of the RFID IC's body **314**. When the RFID IC **312** is mounted to the substrate **326**, the leads **324** may be soldered **332** to antenna elements **328** and/or other circuits **330** of substrate **326** so that the body **314** of the RFID IC **312** is supported above the substrate **326** and antenna elements **328** and/or circuits **330**. The RFID transponder **300** may have a thickness (*t*) which comprises the combined thicknesses of the packaged RFID IC **312**, the substrate **326**, the antenna elements **328** and/or circuits **330** and/or the space between the RFID IC body **314** and the substrate **326** or antenna elements **328** and/or circuits **330**, if any.

As shown in FIGS. 2 through 10, and particularly in FIGS. 4, 5, and 10, the packaged RFID IC **226** of the RFID transponder **200** may be inverted (compared to the orientation of the RFID IC **314** of the prior art RFID transponder **300** shown in FIG. 8) and substantially located within the aperture **214** of the substrate **212**. This orientation reduces the thickness (*t*) form factor of the RFID transponder **200** by eliminating the space between the RFID IC and the substrate of the prior art RFID transponder (**314**, **326** & **300** in FIG. 8), and

reducing the thickness of the RFID IC 226 by an amount equal to the thickness of the RFID IC 226 contained within the aperture 214 of the substrate 212.

Preferably, the leads 232 of the RFID IC package 230 extend upwardly from the aperture 214 and are coupled to the antenna circuit 216 (and/or other circuits formed on the substrate 212). The leads 232 may be bent (i.e., an MSOP or the like) so that they are somewhat "S" or "Z" shaped and have an end extending over the edge of the aperture 214. Alternatively, the leads 232 may be straight (i.e., a SIP, a DIP, etc., not shown). The leads 232 may support the packaged RFID IC 226 within the aperture 214 and may engage the antenna circuit 216 (and/or other circuits) formed on the substrate 212. Preferably, the leads 232 may be soldered to the antenna circuit 216 (and/or other circuits) to secure the RFID IC 226 to the substrate 212. As shown in FIG. 4, an encapsulant 242 may be applied to secure the packaged RFID IC 226 within the aperture 214 and to protect the lead/circuit connections 244.

Referring now to FIGS. 11, 12, and 13, radio frequency integrated circuit (RFIC) chips such as RFID IC 226 may be packaged and orientated with respect to the antenna circuit 216 so that the RF characteristics of the RFID transponder are optimized. The RFID IC package 230 may be generally rectangular in shape and may have a length (l_p) and a width (w_p). An RFID IC chip 228 is encapsulated within the package 230. The RFID IC chip 228 includes first and second antenna contacts or pads 238 & 240 (e.g., signal pad and a ground pad) which may be electrically connected to first and second leads 250 & 252 of the package's lead frame via connectors such as wire bonds 246 & 248. Preferably, the wire bonds 246 & 248 are formed via conventional wire bonding methods.

As shown in FIGS. 2, 8 and 11, the first lead (Pin 1) 250 of the packaged RFID IC 226 may extend from the first side 234 of the package 230. The first lead 250 may be connected to the antenna circuit 216 (i.e., dipole element 218 shown in FIG. 2, or, alternatively, impedance matching circuit 258 shown in FIG. 8). Similarly, a second lead (Pin 8) 252 may extend from the second side 236 of the package 230 opposite the first, where it may likewise be attached to the antenna circuit 216 (i.e., dipole element 220 shown in FIG. 2, or, alternatively,

impedance matching circuit 260 shown in FIG. 8).

Alternatively, as shown in FIGS. 3, 9, and 12, the first lead (Pin 2) 246 and the second lead (Pin 3) 248 may both be on the same side 234 of the package 230 where they may be attached to the antenna circuit 216 (i.e., the first lead 250 may be connected to the dipole antenna element 218 and the second lead 248 may be attached to the dipole antenna element 220 as shown in FIG. 3, or the first lead 250 may be attached to impedance matching element 258 and the second lead 252 may be attached to impedance matching element 260 as shown in FIG. 9).

Alternatively, as shown in FIG. 6, 7, and 13, the first lead (Pin 1) 250 may extend from a first side 234 of the package 230. The first lead 250 may be connected to the antenna circuit 216 (i.e., impedance matching circuits 260 shown in FIGS. 6 and 7). Similarly, the second lead (Pin 16) 252 may extend from a second side 235 of the package 230 where it may be attached to the antenna circuit 216 (i.e., impedance matching circuits 258 shown in FIGS. 6 and 7). Preferably, the first and second sides 234 & 235 form a corner of the package 230. The first and second leads 250 & 252 may be positioned one on each side of the corner at a substantially right angle to each other.

It should be appreciated that in accordance with the second aspect of the invention, packaged RFID IC's may be mounted in the inverted fashion in accordance with the first aspect of the present invention shown in FIGS. 2, 3 and 6, or, alternatively in the conventional manner (so that body of the RFID IC package is completely above the upper surface of the substrate of the RFID transponder) as shown in FIG. 14.

Because the frequency of an RFID system (i.e., RFID system 100 shown in FIG. 1) is typically very high so that the wavelength is very short (i.e., within the microwave range), it is desirable to maximize coupling of external RF energy into the RFID IC chip 228 (especially were the RFID transponder 200 is passive).

The introduction of any discontinuity in the line connecting the antenna circuit 216 and antenna contacts 238 & 240 will cause a change in signal strength or attenuation which will change the function of the RFID IC chip 228 and

performance of the RFID transponder **200**. Consequently, the lines (e.g., leads **250 & 252** and wire bonds **246 & 248**) interconnecting the antenna circuit **216** and antenna contacts **238 & 240** are preferably symmetrical, short in length, and have very few discontinuities so coupling of the RF signal into the RFID IC chip **228** is maximized.

The arrangement and orientation of the RFID IC chip **228**, package **230**, and wire bonds **246 & 248** in accordance with the present invention as shown in FIGS. 11, 12, and 13 result in less discontinuity in the interconnection, which reduces the amount of reflections and spurious radiations, improving the radiation efficiency when connected to an antenna and reducing the mismatch loss and radiation loss when connected to a circuit. The RFID IC chip **228** is preferably oriented within the package **230** so each of the antenna contacts **238 & 240** is substantially adjacent to the lead **250 & 252** to which it is bonded. This orientation allows the package **230** to have a shorter, smoother wire bonds connecting the contacts **238 & 240** to the leads **250 & 252**. Shorter wire bonds **246 & 248** are desirable because the lengths of the wire bonds **246 & 248** and leads **250 & 252** contribute to the inductance of the antenna circuit **216**. Further, when added together, impedance contributed by the wire bonds **246 & 248** and leads **250 & 252** may become a significant portion of the antenna circuit's total impedance. Preferably, the orientation also allows the wire bonds **246 & 248** to have similar lengths.

The lines (e.g., leads **250 & 252** and wire bonds **246 & 248**) interconnecting the RFID IC **228** to the antenna circuit **216** preferably have similar cross-sections, and good conductivity (i.e., are not resistive). In this manner, a smoother transition is provided for the RF wave (e.g., microwave) between the antenna circuit **216** and the antenna contacts **238 & 240** thereby providing improved RF characteristics.

Orientation of the RFID IC **228**, package **230**, and wire bonds **246 & 248** in accordance with the present invention also prevents crossover, bending or kinking of the wire bonds **246 & 248**. Crossovers introduce cross-talk and additional parasitic capacitance or inductance which may degrade performance

of the RFID transponder **200**. Bending or kinking introduces discontinuities in the RF wave (e.g., microwave) structure. Such discontinuities are sources of leakage, radiation loss, etc. which reduce the efficiency of the RFID transponder **200**. For passive RFID transponders **200**, wherein the transponder **200** does not
5 have its own power source, the RFID IC **228** collects power from the RF field via the antenna circuit **216**. Thus, the efficiency of the lines (e.g., leads **250** & **252** and wire bonds **246** & **248**) transmitting RF power between the antenna circuit **216** and the RFID IC **228** helps prevent a reduction in power available to the RFID IC **228**.

10 The orientation of the RFID IC **228**, package **230**, and wire bonds **246** & **248** may also allow the size (e.g., length (l), width (w), or total area) of the substrate **212** of the RFID transponder **200** to be minimized. How the packaged RFID IC **226** is oriented on the substrate **226** is a function of the size and shape of the package **230** (i.e., whether $l_p > w_p$, $l_p < w_p$, or $l_p = w_p$), the dimension (i.e.,
15 length (l), width (w), or overall area) of the substrate **212** to be minimized, and the position and orientation of the packaged RFID IC **226** on the substrate. For example, as shown in FIGS. 2, 5 and 11, the antenna circuit **216** may comprise a simple dipole antenna which includes a first dipole element **218** and a second dipole element **220** formed on the surface of the substrate **212** on each side of
20 the packaged RFID IC **226**. Preferably, as shown in FIG. 11, the first lead (Pin 1) **250** extends from the first side **234** of the package **230** and is connected to the first antenna circuit element **218** while the second lead (Pin 8) **252** extends from the second side **236** of the package **230** opposite the first and is attached to the second antenna circuit element **220**. This allows the package **230** to be
25 positioned on the substrate **212** so that the length (l_p) of the package **230** is perpendicular to the dipole elements **218** & **220** of the antenna circuit **216**, and the length (l) of the substrate **212** while the width (w_p) of the package **230** is parallel to the dipole elements **218** & **220** and width (w) of the substrate **212**. Thus, referring to FIGS. 2 and 5, wherein the package's width (w_p) is shorter than
30 its length (l_p), the length (l) of the substrate **212** may be reduced. Alternately,

wherein the package's width (w_p) is longer than its length (l_p), the width (w) of the substrate 212 may be reduced.

Similarly, as shown in FIGS. 3 and 12, the antenna circuit 216 may comprise a meander dipole antenna which includes a first dipole element 218 and a second dipole element 220 formed on the surface of the substrate 212 adjacent to the packaged RFID IC 226. Preferably, as shown in FIG. 12, the first lead (Pin 2) 246 and the second lead (Pin 3) 248 are both located on the same side 234 of the package 230. The first lead 246 may be connected to the first dipole element 218, and the second lead 248 attached to the second dipole element 220. This allows the package 230 to be positioned on the substrate 212 so that the length (l_p) of the package 230 is parallel to the longitudinal length of the antenna 216 and length (l) of the substrate 212 while the width (w_p) of the package 230 is perpendicular to the longitudinal length of the antenna 216 and width (w) of the substrate 212. Thus, wherein the package's width (w_p) is longer than its length (l_p), the length (l) of the substrate 212 may be reduced. Alternately, wherein the package's width (w_p) is shorter than its length (l_p), the width (w) of the substrate 212 may be reduced.

Turning now to FIGS. 6, 7, 8 and 9, the antenna circuit 216 may further comprise a patch antenna including a patch element 254, one or more impedance matching circuits 258 & 260, and a conducting ground plane 256. The patch antenna may be a linearly polarized patch antenna as shown in FIGS. 6, 8, and 9, or, as shown in FIG. 7, a circularly polarized patch antenna. As shown in FIGS. 6, 7 and 13, the first lead (Pin 1) 250 and second lead (Pin 16) 252 may be arranged at a right angle to each other at a corner of the package 230. Similarly, as shown in FIGS. 8 and 11, the first lead (Pin 1) 250 may extend from the first side 234 of the package 230 while the second lead (Pin 8) 252 extends from the second side 236 of the package 230 opposite the first. Further, as shown in FIGS. 9 and 12, the first lead (Pin 2) 246 and the second lead (Pin 3) 248 are both located on the same side 234 of the package 230. By altering the lead (pin) 232 arrangement in this manner, the packaged RFID IC 226 may be oriented and mounted on the substrate 212 and bonded to the antenna circuit

216 to provide a smoother transition for the RF wave (e.g., microwave) between the antenna and the RFID IC 226 and/or to reduce or minimize the surface area of the RFID transponder 200.

Various modifications may be made in and to the above described
5 embodiments without departing from the spirit and scope of the invention. For example, modifications and changes may be made in the configuration of the RFID IC, the placement of the RFID IC on the substrate, the antenna circuit geometry, substrate material, package material, or package geometry. Further,
10 use of the RFID transponder is directed to a wide variety of applications including, but not limited to, airline baggage (i.e., luggage, freight, and mail), postal service, manufacturing, inventory control, personnel security, and the like.

It is believed that the present invention and many of its attendant advantages will be understood by the foregoing description, and it will be apparent that various changes may be made in the form, construction and
15 arrangement of the components thereof without departing from the scope and spirit of the invention or without sacrificing all of its material advantages. The form herein before described being merely an explanatory embodiment thereof, it is the intention of the following claims to encompass and include such changes.

Claims

What is claimed is:

1. A packaged radio frequency circuit, comprising:
a lead frame package having at least one lead for coupling the packaged radio
5 frequency circuit to an antenna circuit;
a radio frequency circuit chip contained within said lead frame package, said
circuit chip including an antenna contact; and
a connector electrically connecting the antenna contact and lead;
wherein the antenna contact is oriented with respect to the lead so that said
10 connector increases coupling of radio frequency energy received by the
antenna circuit into said radio frequency circuit chip.
2. The packaged radio frequency circuit in accordance with claim 1,
wherein said radio frequency circuit chip comprises a radio frequency
15 identification integrated circuit chip.
3. The packaged radio frequency circuit in accordance with claim 1,
wherein the lead and said connector have similar cross-sections to provide a
smooth transition of a radio frequency wave to the antenna contact.
20
4. The packaged radio frequency circuit in accordance with claim 1,
wherein said connector is a wire bond.
5. The packaged radio frequency circuit in accordance with claim 1,
25 wherein said package includes a second lead and said radio frequency circuit
chip includes a second antenna contact, and wherein the packaged radio
frequency circuit comprises a second connector disposed within said package
for interconnecting the second lead and the second antenna contact.
- 30 6. The packaged radio frequency circuit in accordance with claim 5,
wherein said radio frequency circuit chip and connectors are oriented within said

package so that coupling of a radio frequency signal into the radio frequency circuit chip is increased.

7. The packaged radio frequency circuit in accordance with claim 5,
5 wherein the first lead extends from a first side of said package and the second lead extends from a second side of said package opposite the first side.

8. The packaged radio frequency circuit in accordance with claim 5,
10 wherein the first and second leads extend from the same side of said package.

9. The packaged radio frequency circuit in accordance with claim 5,
wherein the first lead extends from a first side of said package and the second lead extends from a second side of said package, and wherein the first and second leads are positioned one on each side of a corner of the package at a
15 substantially right angle to each other.

10. The packaged radio frequency circuit in accordance with claim 5,
wherein the leads and said connectors have similar cross-sections to provide a smooth transition of a radio frequency wave to the antenna contact.
20

11. The packaged radio frequency circuit in accordance with claim 3,
wherein said connectors are wire bonds.

12. A radio frequency identification transponder, comprising:
25 an insulating substrate;
an antenna circuit formed as an integral part of said substrate, said antenna circuit including an antenna; and
a packaged radio frequency identification integrated circuit further comprising:
a lead frame package having at least one lead for coupling the packaged
30 radio frequency circuit to said antenna circuit;

a radio frequency circuit chip contained within said lead frame package,
said circuit chip including an antenna contact; and
a connector connecting the antenna contact and lead;
wherein the antenna contact is oriented with respect to the lead so that
5 said connector increases coupling of radio frequency energy
received by the antenna into said radio frequency circuit chip.

13. The radio frequency identification transponder in accordance with
claim 12, wherein the radio frequency circuit chip and connector are oriented
10 within the package so that coupling of a radio frequency signal from the antenna
into the circuit chip is optimized.

14. The radio frequency identification transponder in accordance with
claim 13, wherein the lead and connector have similar cross-sections to provide
15 a smooth transition of a radio frequency wave from the antenna to the antenna
contact of the radio frequency circuit chip.

15. The radio frequency identification transponder in accordance with
claim 12, wherein the connector is a wire bond.
20

16. The radio frequency identification transponder in accordance with
claim 12, wherein the package includes a second lead and said radio frequency
circuit chip includes a second antenna contact positioned adjacent to the second
lead, and wherein the packaged radio frequency identification integrated circuit
25 comprises a second connector disposed within said package for interconnecting
the second lead and the second antenna contact.

17. The radio frequency identification transponder in accordance with
claim 16, wherein the radio frequency circuit chip and connectors are oriented
30 within the package so that coupling of a radio frequency signal from the antenna
into the circuit chip is increased.

18. The radio frequency identification transponder in accordance with claim 16, wherein the first lead extends from a first side of the package and the second lead extends from a second side of the package opposite the first side of the package.

19. The radio frequency identification transponder in accordance with claim 16, wherein the first and second leads extend from the same side of the package.

20. The radio frequency identification transponder in accordance with claim 16, wherein the first lead extends from a first side of the package and second lead extends from a second side of the package, and wherein the first and second leads are positioned one on each side of a corner of the package at a substantially right angle to each other.

21. The radio frequency identification transponder in accordance with claim 16, wherein the leads and connectors have similar cross-sections to provide a smooth transition of a radio frequency wave from the antenna to the antenna contact of the radio frequency circuit chip.

22. The radio frequency identification transponder in accordance with claim 12, wherein the connectors are wire bonds.

23. The radio frequency identification transponder in accordance with claim 12, wherein said radio frequency circuit chip is oriented on said substrate so that the surface area of said substrate is minimized.

24. The radio frequency identification transponder in accordance with claim 12, wherein said substrate includes an aperture, and wherein said packaged radio frequency integrated circuit is substantially and operably located

within the aperture so that the lead extends from the aperture and is interconnected to said antenna circuit.

25. The radio frequency identification transponder in accordance with claim 12, wherein said packaged radio frequency integrated circuit is oriented on the substrate so that coupling of a radio frequency signal from the antenna into the radio frequency circuit chip is increased.

26. A packaged radio frequency circuit, comprising:
10 a lead frame package having first and second leads for coupling the packaged radio frequency circuit to an antenna circuit;
a radio frequency circuit chip contained within said lead frame package, said radio frequency circuit chip including first and second antenna contacts;
a first connector connecting the first antenna contact to the first lead;
15 a second connector connecting the second antenna contact to the second lead;
wherein the first antenna contact is oriented with respect to the first lead and the second antenna contact is orientated with respect to the second lead so that the first and second antenna contacts, the first and second connectors and the first and second leads maximize coupling of radio frequency energy received by the antenna into the radio frequency circuit chip.
20

27. The packaged radio frequency circuit in accordance with claim 26, wherein the first lead extends from a first side of said package and the second lead extends from a second side of said package opposite the first side.
25

28. The packaged radio frequency circuit in accordance with claim 26, wherein the first and second leads extend from the same side of said package.

30 29. The packaged radio frequency circuit in accordance with claim 26, wherein the first lead extends from a first side of said package and the second

lead extends from a second side of said package, and wherein the first and second leads are positioned one on each side of a corner of the package at a substantially right angle to each other.

5 30. The packaged radio frequency circuit in accordance with claim 26, wherein the leads and said connectors have similar cross-sections to provide a smooth transition of a radio frequency wave to the antenna contact.

 31. The packaged radio frequency circuit in accordance with claim 26,
10 wherein said connectors are wire bonds.

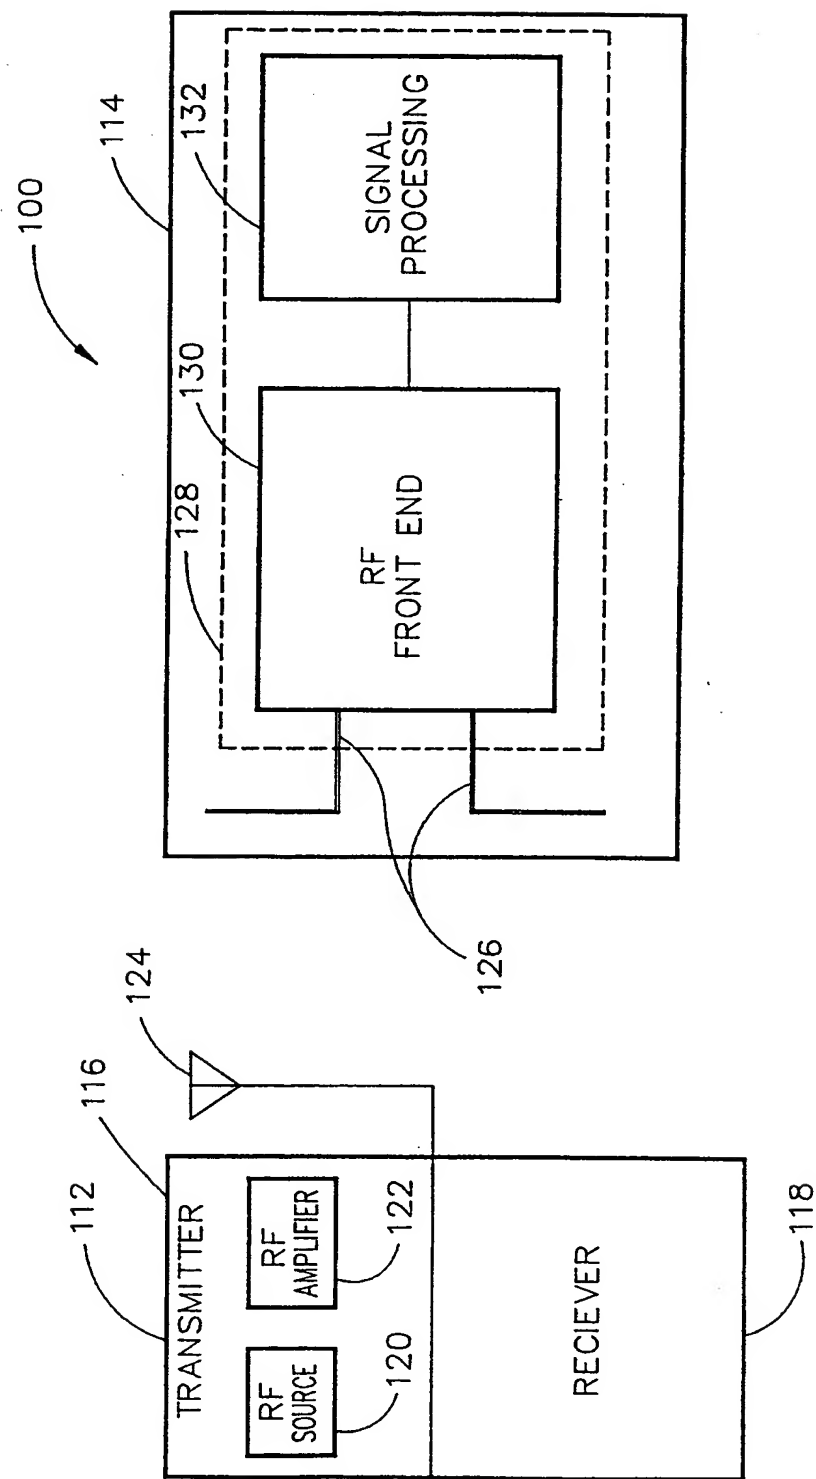


FIG. 1

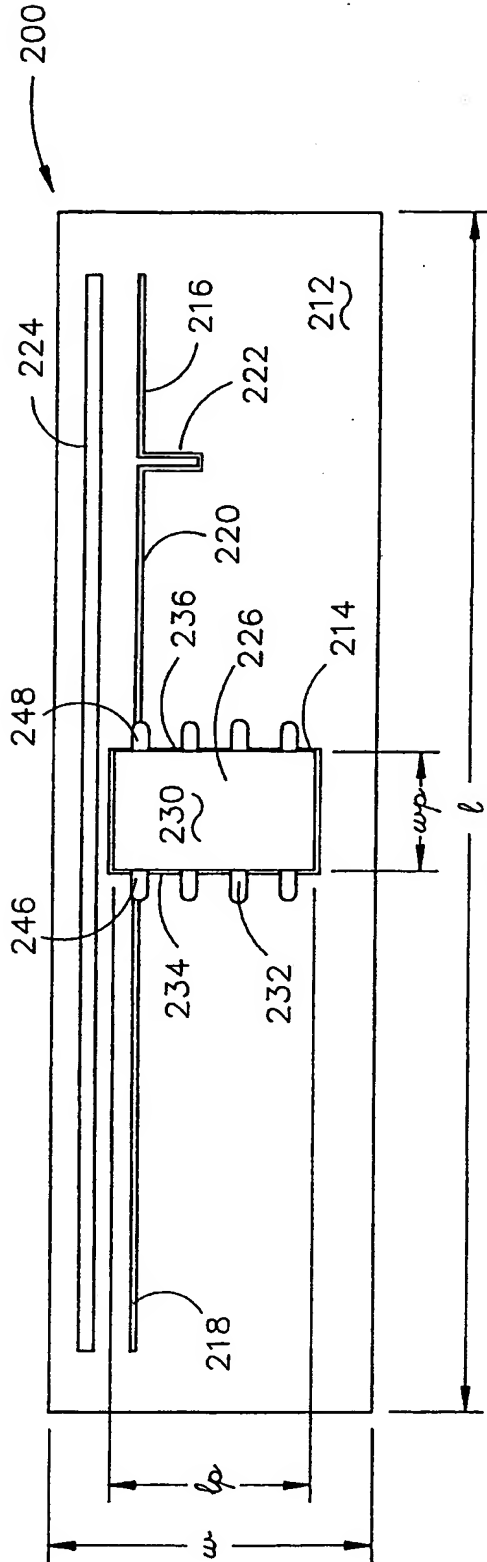


FIG. 2

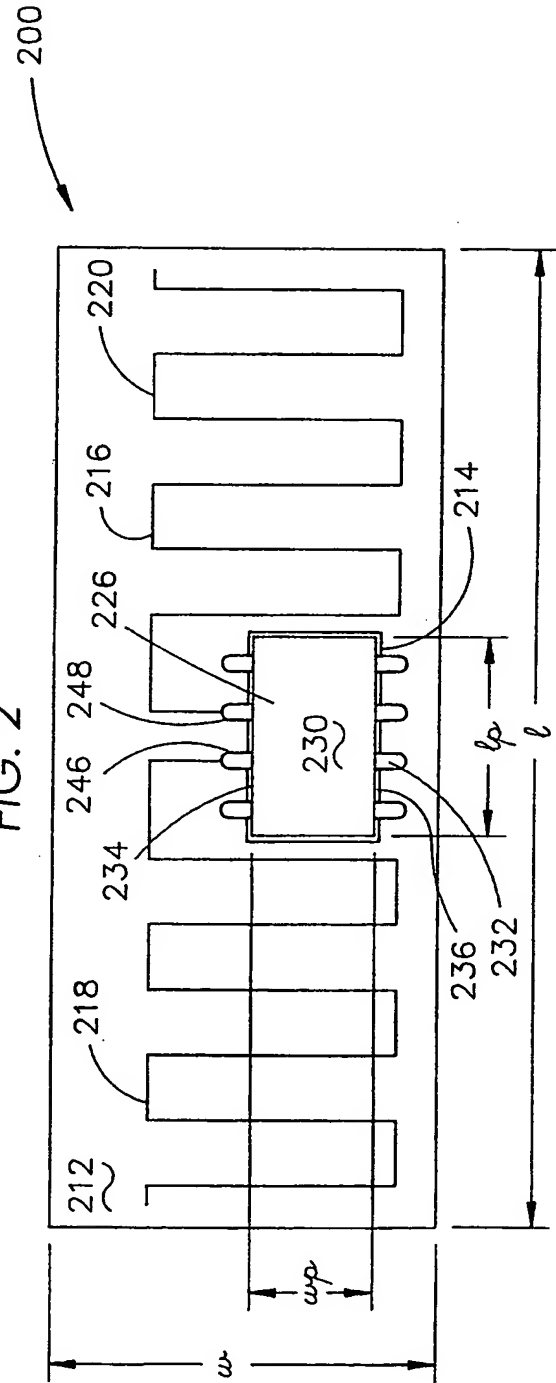


FIG. 3

3/8

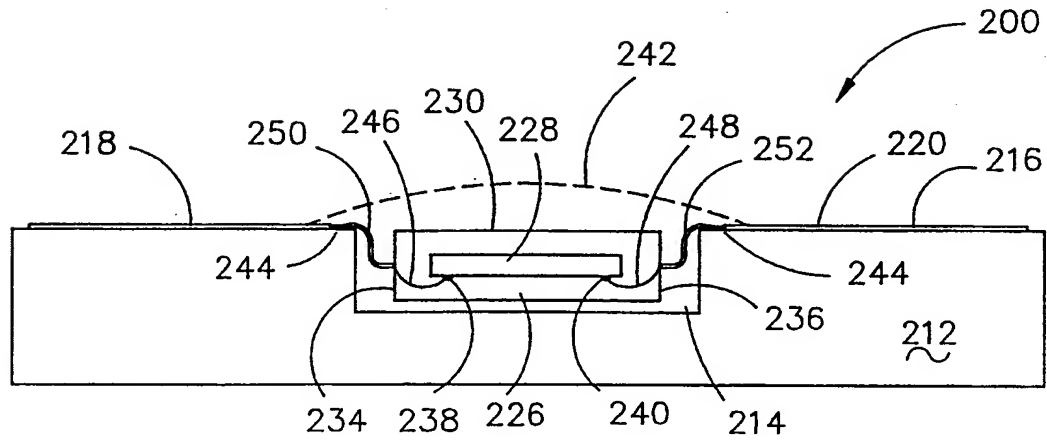


FIG. 4

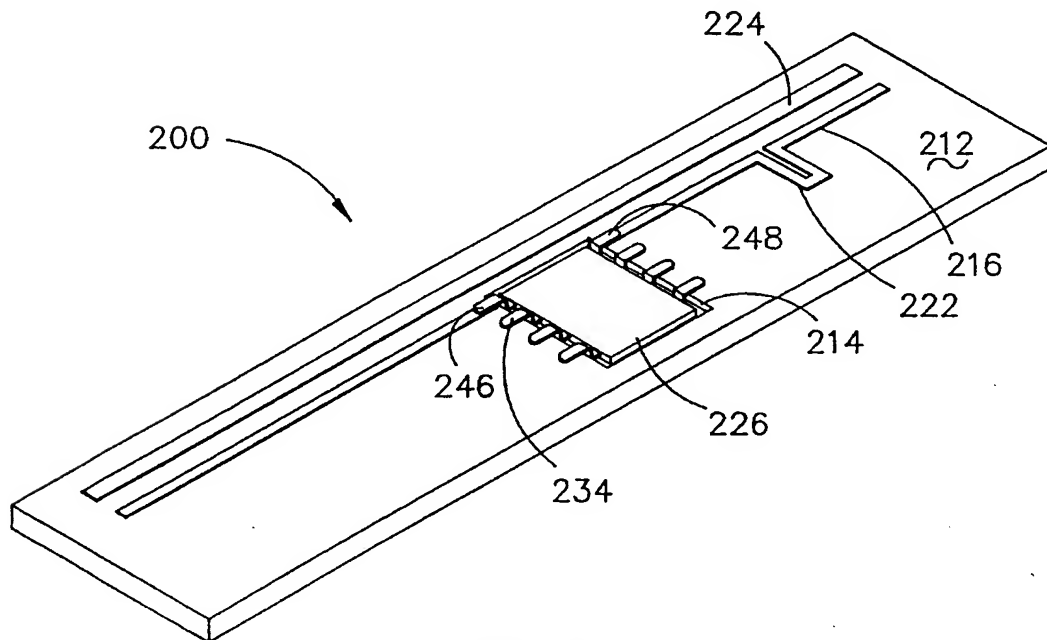


FIG. 5

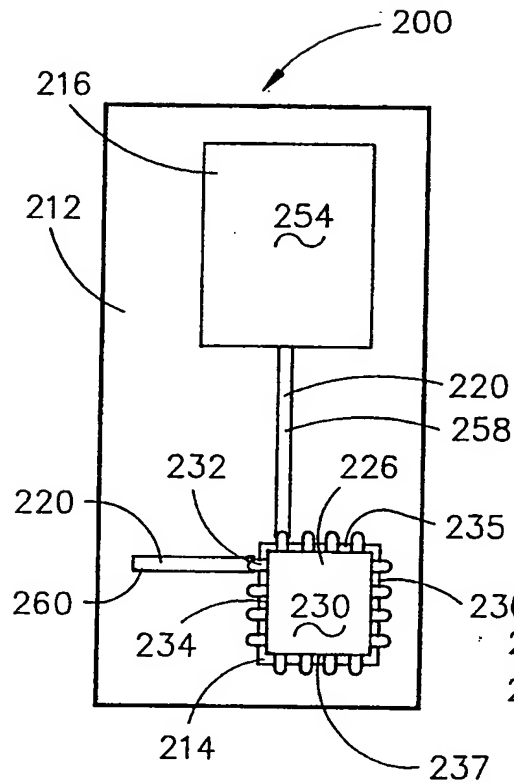


FIG. 6

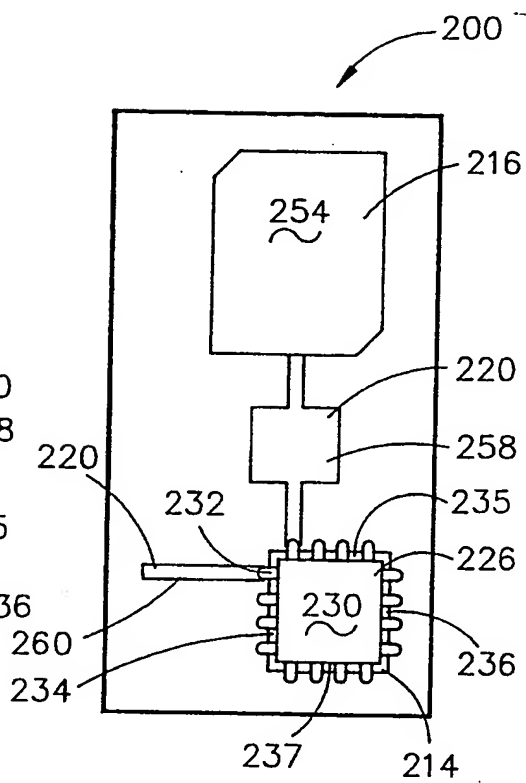


FIG. 7

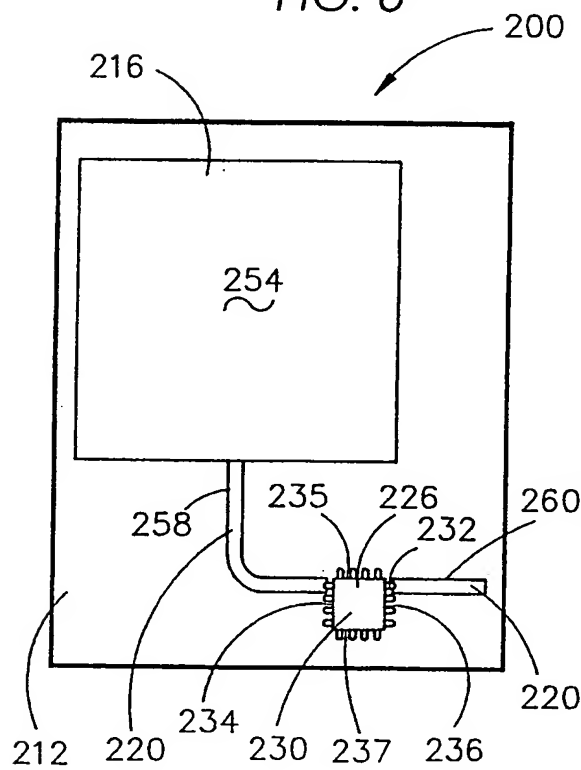


FIG. 8

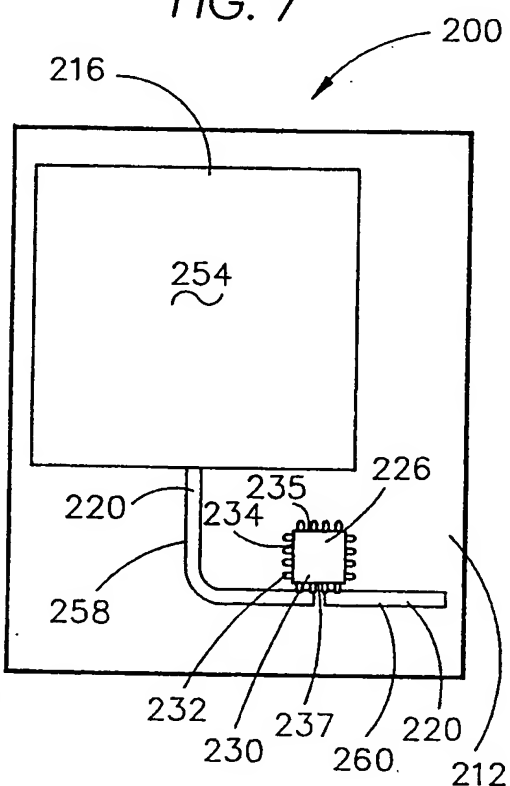


FIG. 9

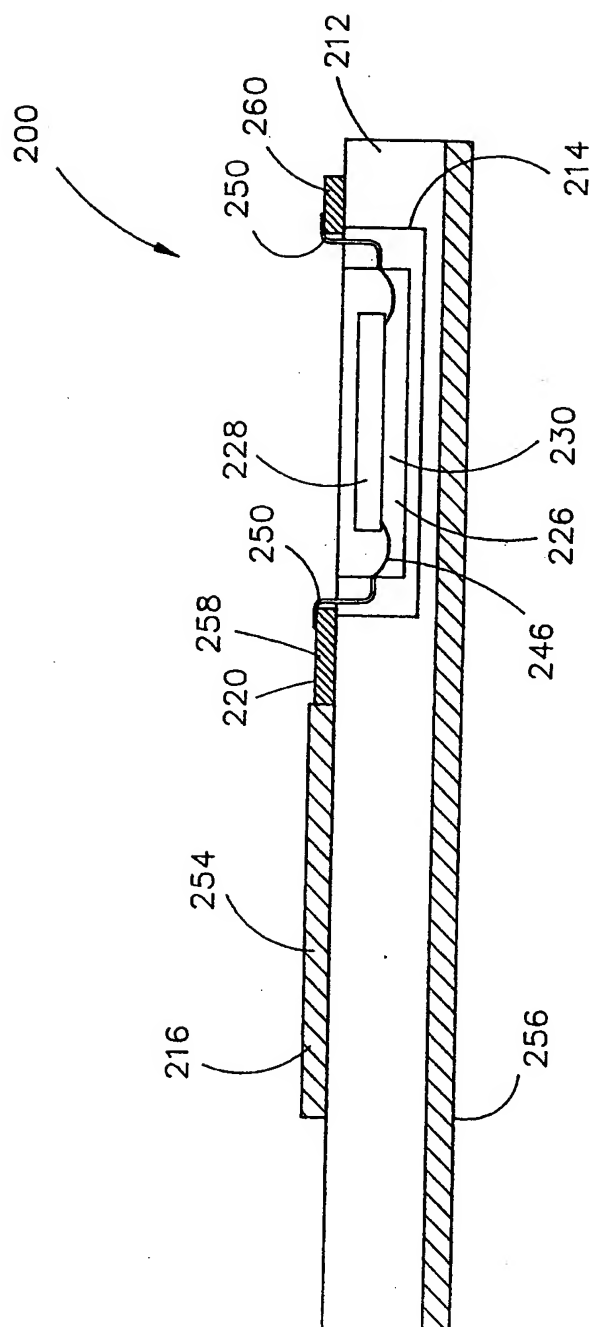


FIG. 10

6/8

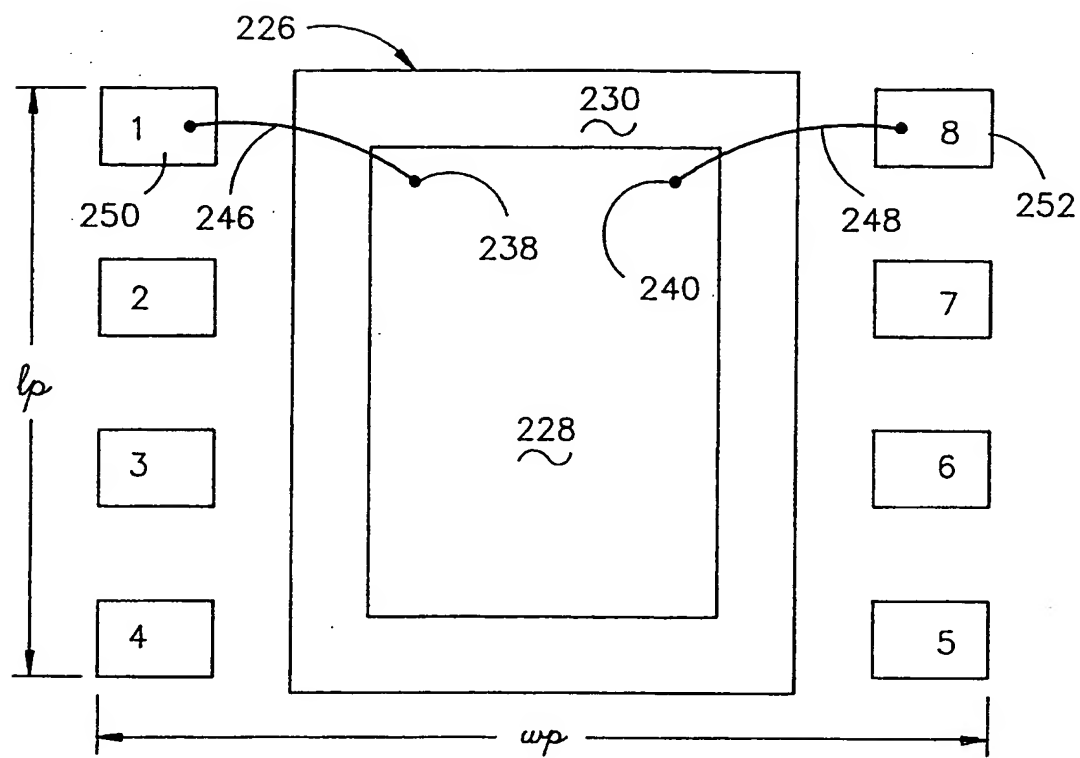


FIG. 11

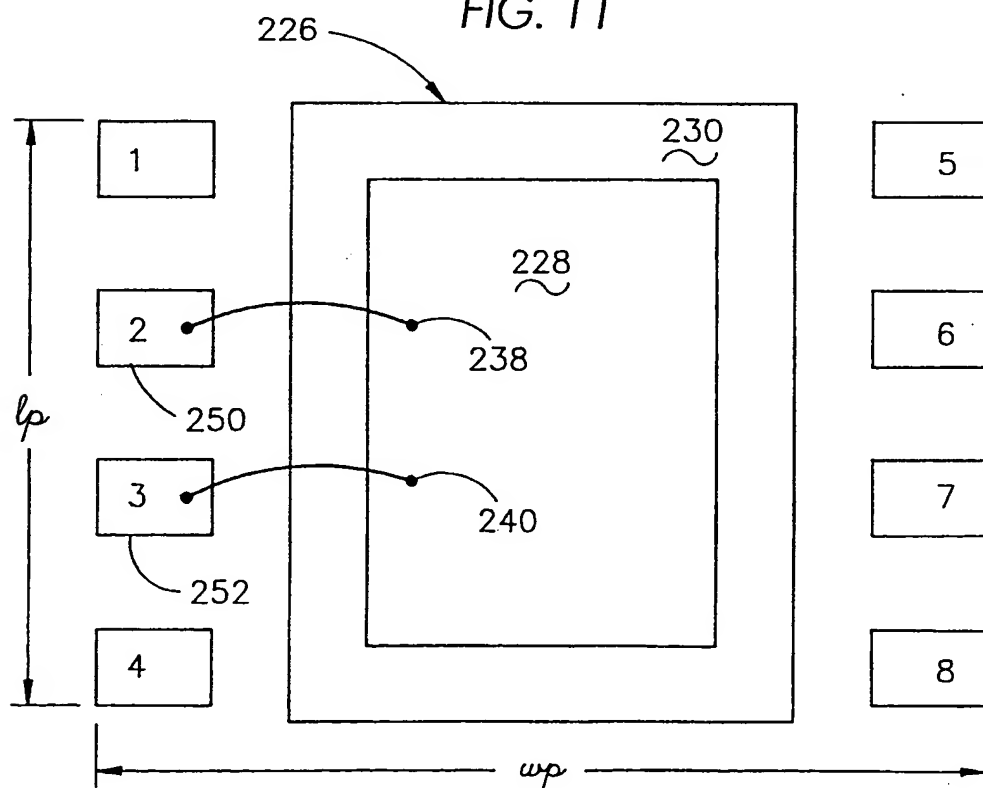


FIG. 12

7/8

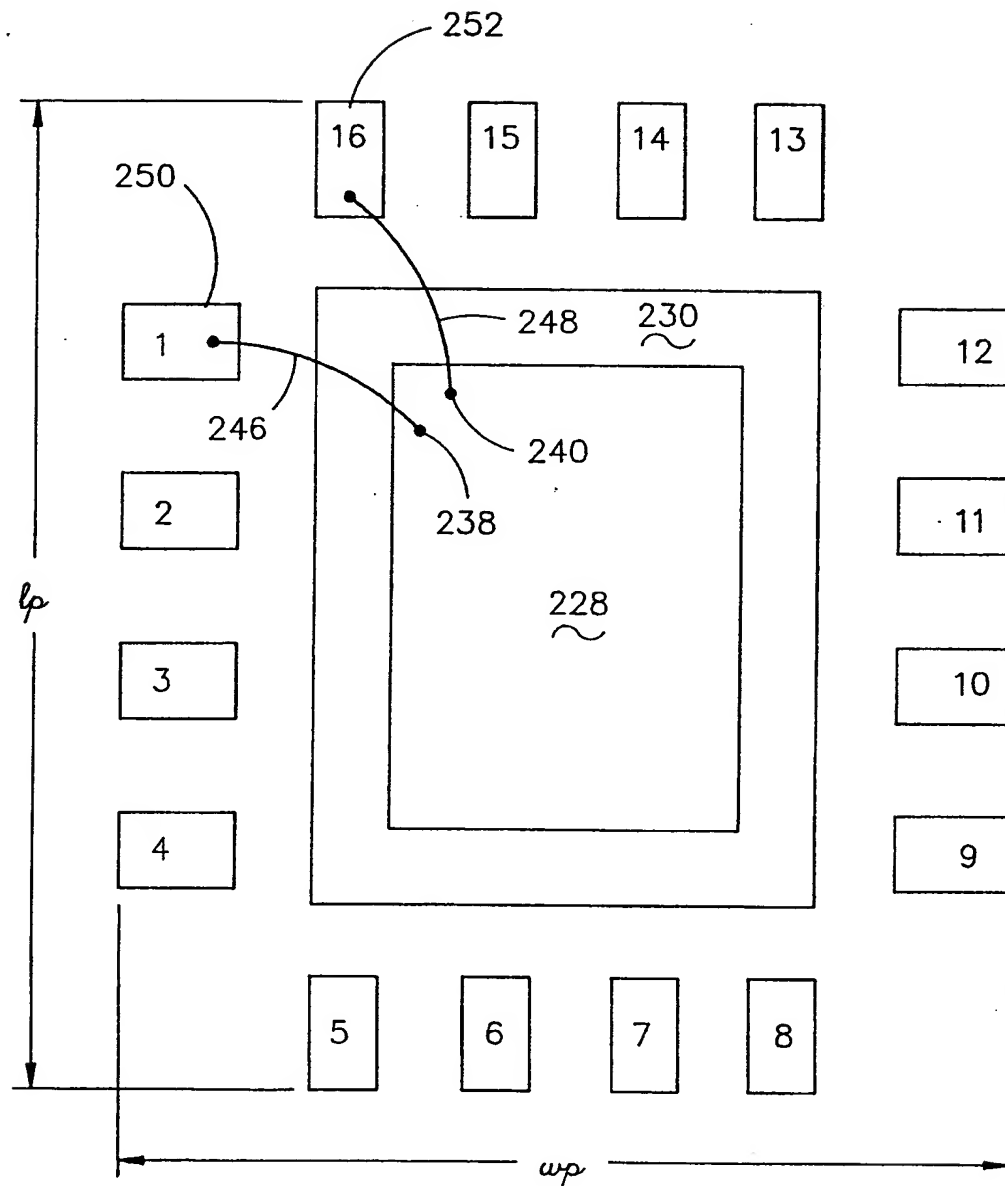


FIG. 13

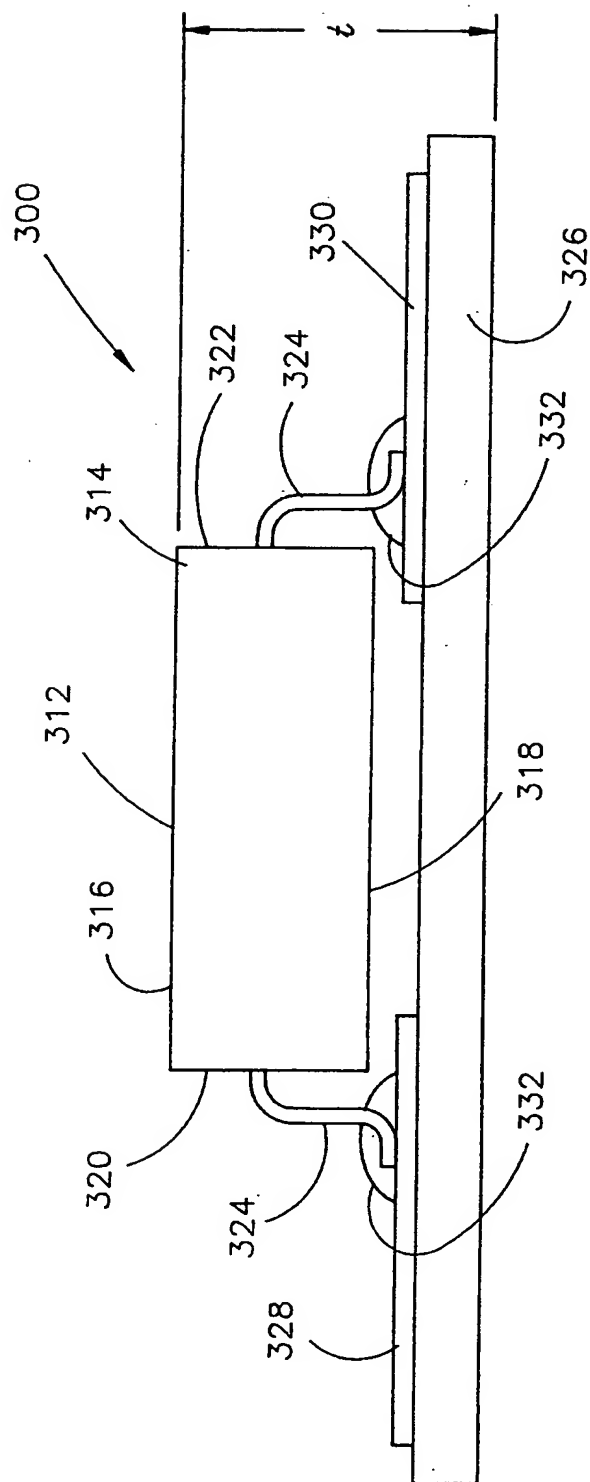


FIG. 14
(PRIOR ART)

INTERNATIONAL SEARCH REPORT

Int. National Application No
PCT/US 00/02042

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K19/077

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 44 31 754 C (SIEMENS AG) 23 November 1995 (1995-11-23)	1,2,4-9, 12-23, 25-29,31
Y	the whole document	24
Y	EP 0 756 244 A (GIESECKE & DEVRIENT GMBH) 29 January 1997 (1997-01-29) column 6, line 45 -column 7, line 11; figures 5A,5B	24
X	DE 197 03 057 A (PAV CARD GMBH ;SIEMENS AG (DE)) 2 July 1998 (1998-07-02) the whole document	1,2,4-9, 12-23, 25-29,31
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 May 2000

Date of mailing of the international search report

26/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Chiarizia, S

INTERNATIONAL SEARCH REPORT

Int. Jonal Application No

PCT/US 00/02042

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 682 321 A (GIESECKE & DEVRIENT GMBH) 15 November 1995 (1995-11-15)</p> <p>abstract; figure 2</p>	<p>1,2,4-9, 12-23, 25-29,31</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. .onal Application No

PCT/US 00/02042

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4431754	C	23-11-1995	AT 173552 T	15-12-1998
			CN 1160449 A	24-09-1997
			WO 9607983 A	14-03-1996
			DE 59504284 D	24-12-1998
			EP 0780005 A	25-06-1997
			ES 2125649 T	01-03-1999
			JP 2785232 B	13-08-1998
			JP 9512367 T	09-12-1997
EP 0756244	A	29-01-1997	DE 19527359 A	13-02-1997
DE 19703057	A	02-07-1998	WO 9833143 A	30-07-1998
			BR 9707580 A	27-07-1999
			CN 1212063 A	24-03-1999
			WO 9828709 A	02-07-1998
			DE 19703058 C	10-06-1998
			EP 0891603 A	20-01-1999
EP 0682321	A	15-11-1995	DE 4416697 A	16-11-1995
			JP 8044840 A	16-02-1996
			US 5880934 A	09-03-1999